COSWICK HARDWOOD FLOORING | TECHNICAL INFORMATION

Product # 1133-7921

COSWICK
Solid Hardwood Floors




COLLECTION | ARTS & CRAFTS
COLOR | OLD VENICE

Wood species | Oak
Grade | Character
Constructions | 3-layer Single Strip Flooring CosLoc
Size | 15 x 190 x 2100 mm (⅝" x 7 ½" x 7')
Finish | Hardwax Oil

CONSTRUCTION : 3-LAYER SINGLE STRIP FLOORING CosLoc 5G

DIMENSIONS :	
Thickness	15 mm (⅝")
Width	190 mm (7 ½")
Length	2100 mm (7')
Average length	2100 mm (7')
Microbevel	0,5 mm
Joint type	Click system (CosLoc)

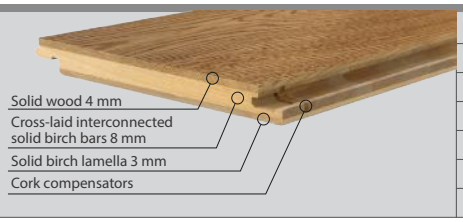

PACKAGING :	BOX	PALLET
Content:	2,4 m²	40 (96,0 m²)
Weight	25 kg	1002 kg
H x W x L	100 x 225 x 2150 mm	1120 x 905 x 2160 mm
Content:	26 sq.ft.	1040 sq.ft.
Weight	55 lb	2250 lb
H x W x L	4" x 10" x 85"	44" x 36" x 85"

DEVIATIONS :		
Deviation on Thickness	± 0,2 mm	EN 13489 ГОСТ 862.3 СТБ 2121
Deviation on Width	± 0,2 mm	
Height Difference	≤ 0,2 % of width	
Cup	≤ 0,2 % of plank width	
Bow	≤ 0,1 % of length	EN 13489
Spring	≤ 0,5 % of length	

CHARACTERISTICS :		
Fire resistance	Dfl-s1	EN 14342
Formaldehyde emission class	E1	
Pentachlorophenol content	None	
Thermal resistance	0,095 m²·K/W	
Thermal conductivity	0,158 W/(m·K)	
Structural warranty	Lifetime	

INSTALLATION :



Can be installed by floating way on underlayment or by glueing down over concrete, plywood or wooden subfloor. Applicable above and on the ground level. Suitable for installation over radiant heating systems.

STORAGE AND USAGE :



— Air humidity 40% – 65%
— Temperature +18 °C – +22 °C

FINISH : HARDWAX OIL

DESCRIPTION :	
Type of coating	Organic oils and waxes, oxidative
Surface (finish) type	Open pores, wire brushed
Sheen	Not rated
Finish warranty	-

CLASSIFICATION SURFACE CHARACTERISTICS :		
Wear resistance	Not rated	EN 438-2
Scratch resistance	Not rated	EN 438
Slip resistance	40 (SRV dry)	EN 15676
Resistance to chemical agents	Class 4 (Except blue ink)	EN 13442
Repairability	High	

MAINTENANCE AND CARE CONDITIONS :

Maintenance of hardwood floors with Hardwax Oil finish assumes regular (daily if necessary) cleaning from dust and grit using a vacuum, followed by a thorough cleaning with Coswick Hardwood Floor Cleaner or other similar product. Floor surface areas that receive the most traffic and get worn down quicker, such as areas by the front door, hallways, kitchens etc., should be periodically cleaned with special Restorative Hardwood Floor Cleaner. Aside from cleaning the floor, this product also restores the protective wax film. Frequency of use depends on type of interior and intensity of foot traffic. For residential interiors, floor renewal procedure should be performed once in 3-5 years, depending on intensity of foot traffic and floor maintenance practices.

GRADE : CHARACTER

DESCRIPTION :		DESCRIPTION :	
Sound sapwood	No limit	Bark pocket	No limit (after filling)
Colour variation	No limit	Pith	Permitted
Knot	No limit (after filling)	Slope of grain	Permitted
Checks	Permitted filled up to 3 mm in width	Medullary ray	Permitted

Coswick Ltd.
2B Kolasa Str., 223034 Zaslavl, Republic of Belarus
Tel.: +375-17-543-2012, Fax: +375-17-543-2020, E-mail: sales@coswick.com
www.coswick.com

nwfa National Wood Flooring Association
ECO FRIENDLY
No added fornaldehyde
ISO 9001
FSC
CE